

FlowSport

A synthetic, flexible, polyurethane, indoor sports floor system that provides a resilient and uniform surface for leisure facilities.

Court lines can be applied in internationally recognised colours on top of the floor finish.



Flexible:

Delivers a cushioned effect underfoot for the well-being of facility users.



Seamless:

Applied seamlessly for ease of cleaning and maintenance.



Attractive:

Choose from a range of bright and attractive colours.



Eliminates Glare:

Satin finish eliminates glare and light reflection for sports persons.



Hard-Wearing:

Hard-wearing & abrasion resistant suitable for regular usage.



Blue



Green



Red



Grey

The applied colours may differ from the examples shown.
For a full colour chart and samples, contact your local Flowcrete office.



Technical Profile*

SLIP RESISTANCE**

Method described in BS 7976-2 (typical values for 4-S rubber slider)

Dry > 40, Wet depends on specification (in accordance with HSE and UKSRG guidelines)

THERMAL RESISTANCE

Tolerant up to 50°C

WATER PERMEABILITY

Nil – Karsten test (impermeable)

COMPRESSION SET

97-99% recovery typical after 72 hours at 50% compression at 20°C

COMPRESSION PROPERTIES

10% Modulus
50% Modulus

7 kg/cm² typical
50 kg/cm² typical

CHEMICAL RESISTANCE

Contact Technical Department

ABRASION RESISTANCE (TOPCOAT)

Taber Abrader:
1 kg load using CS10 wheels

80mg loss per 1000 cycles

1 kg load using H18 wheels

400mg loss per 1000 cycles

SHORE A HARDNESS

50

SPEED OF CURE

10 °C

20 °C

30 °C

Light Traffic

36 h

24 h

12 h

Full Traffic

72 h

48 h

24 h

Full Chemical Cure

12 d

7 d

7 d

Cure at ambient temperatures in the range 0°C to 30°C can be achieved by altering the quantity of catalyst used. For applications below 0°C, please consult our Technical Department.

* These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.


**The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

Model Specification

System	FlowSport
Finish	Satin
Thickness	Dependant on specification
Manufacturer	Flowcrete Asia

Preparatory work and application in accordance with manufacturer's instructions.

System Design

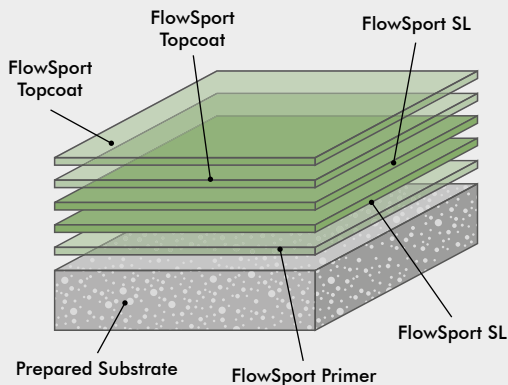

Products Included In This System

Primer	FlowSport Primer
Base Coat	FlowSport SL
Finishing Coat	FlowSport Topcoat

Detailed application instructions are available upon request.

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm², free from laitance, dust and other contamination. The substrate should be dry up to 75% RH as per BS8204 and free from rising damp and ground water pressure.

Installation Service

The installation should be carried out by a licensed contractor with a documented quality assurance scheme. For details of our licensed contractors, contact our customer service team or enquire via our website at www.flowcreteasia.com

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

Important Note

Flowcrete products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages.

Further Information

To ensure you are specifying a fit-for-purpose floor, please consult our Technical Advisors or visit our website to register your interest in specifying one of the most durable floors on the market.

1. Light colours may require additional coats to achieve desired results 2. It is recommended that top coat colours are close to base coats colours to achieve desired results
3. This product is not UV stable and may discolour unless otherwise stated 4. System Data Sheet to be read in conjunction with Method Statement and Product data Sheets.